



## 5MP AHD Bullet Camera

- High Resolution 5MP
- H.265 Compression
- Ultra Low Illumination
- Long-Distance Real-Time Transmission
- OSD Control 4 IN 1 OUTPUTS
- IP66 Compliant
- NDAA Compliant



### Ultra Low Illumination

Sparsh cameras can capture visible images in low light scenarios without the use of auxiliary lighting. High-quality sensors, image processing units, ISP/DSP and lens optics all contribute to cameras performing exceptionally well in low-light and night-vision environments.

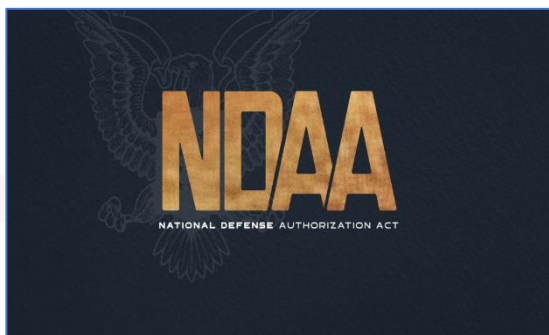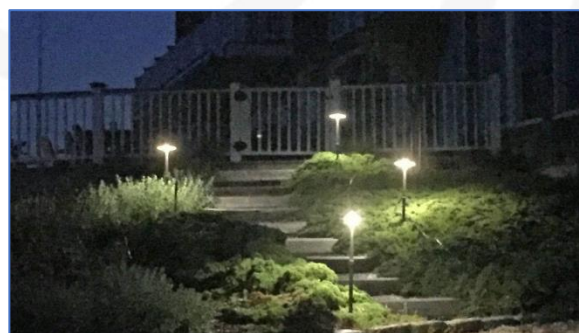

### NDAA Compliant

Our HD Cameras are NDAA compliant that conform to the guidelines set by National Defense Authorization Act & do not use components made by the listed prohibited Manufacturers.

### 4 IN 1 Outputs (AHD-TVI-CVI-CVBS)

One camera with 4 different video standard outputs. Sparsh analog cameras can provide AHD/TVI/CVI/CVBS outputs as per the requirement. Outputs can be conveniently controlled by OSD.



## Technical Specifications:

Specifications	SCAB50B-63
<b>Camera</b>	
Image sensor	1/2.9" Progressive CMOS Sensor
Effective Pixels	2592(H)x1944(V)
Min. Illumination	0.001Lux @ (F1.2, AGC ON)
S/N Ratio	>55dB
Shutter Speed	1/50 sec ~ 1/50000 sec
LEDs	36 Smart IR LEDs
IR Range	Up to 30Mtr
Signal System	PAL/NTSC
<b>Lens</b>	
Lens Type	Fixed
Mount Type	M12
Focal Length	6mm
Max. Aperture	F2.0
Angle Of View	<b>6mm:</b> 58.8°
Focus Control	Fixed
<b>Video</b>	
Resolution	5MP@25fps
Image Setting	Color, Brightness, Sharpness
BLC Mode	On/Off
White Balance	Auto/Manual
Gain Control	Auto/Manual
Dynamic Range	80dB
Video Output Signal	HD Analog Output
Audio Compression	G.711A/U
<b>PTZ (Manual)</b>	
Pan	0° ~360°
Tilt	0° ~90°
Rotation	0° ~360°
<b>Interface</b>	
Coaxial OSD Control	4 IN 1 Outputs (AHD-TVI-CVI-CVBS)
Audio	Support over Coaxial (Built in Mic)(Optional)
Transmission Distance	Up to 500m over coaxial cable
<b>General</b>	
Material	Metal Enclosure
Operating Conditions	-10° C ~ +60° C / Less than 90% RH
Storage Conditions	-10° C ~ +60° C / Less than 90% RH



\*Product specifications & appearance are subject to change without prior notice or obligation.

Ingress Protection	IP66
Vandalism Protection	NA
Power supply	DC 12V $\pm$ 10%, 250mA
Power Consumption	Max 3.5W
Dimension & Weight	177mm(L) x 64.5mm(W) x 62.5mm(H), 260 g
Product Certification	Safety: CE, FCC, IS/EN:60950-1, IS:13252 (Part 1): 2010, BIS Registered

## Ordering Information:

Sr. No.	Ordering Model	WDR	Audio	LED Range
1.	SCAB50B-63	80dB	NA	Up to 30M
2.	SCAB50B-63 with Audio	80dB	Yes	Up to 30M



\*Product specifications & appearance are subject to change without prior notice or obligation.