


AHD Dual Light Bullet Camera

- High Resolution 5MP
- H.265 Compression
- Ultra Low Illumination
- Long-Distance Real-Time Transmission
- OSD Control 4 IN 1 OUTPUTS
- IP66 Compliant
- NDAA Compliant



Color Night Vision

Our Color+ Series Cameras are equipped with more powerful image sensors. White light allows sensor to absorb more visible light, enabling cameras to continue produce color even in complete darkness.

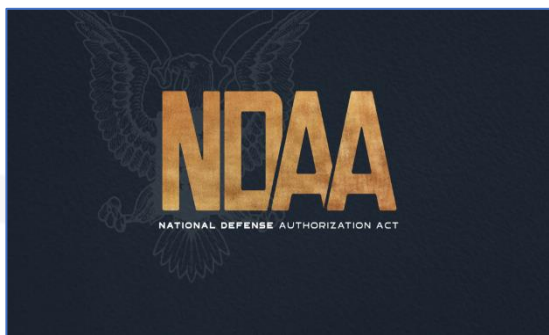

NDAA Compliant

Our HD Cameras are NDAA compliant that conform to the guidelines set by National Defense Authorization Act & do not use components made by the listed prohibited Manufacturers.

4 IN 1 Outputs (AHD-TVI-CVI-CVBS)

One camera with 4 different video standard outputs. Sparsh analog cameras can provide AHD/TVI/CVI/CVBS outputs as per the requirement. Outputs can be conveniently controlled by OSD.



Technical Specifications:

Specifications	SC-ASR50BP-D25
Camera	
Image sensor	1/2.9" Progressive CMOS Sensor
Effective Pixels	2560(H) X 1920(V)
Min. Illumination	0.001Lux @ (F1.2, AGC ON)
S/N Ratio	>55dB
Shutter Speed	1/50 sec ~ 1/50000 sec
LEDs	4 Dual Light LEDs
LED Range	Up to 20Mtr
Signal System	PAL/NTSC
Lens	
Lens Type	Fixed
Mount Type	M12
Focal Length	3.6mm
Max. Aperture	F2.0
Angle Of View	3.6mm: 70.9°
Focus Control	Fixed
Image	
Resolution	5MP@25fps
Image Setting	Color, Brightness, Sharpness
BLC Mode	On/Off
White Balance	Auto/Manual
Gain Control	Auto/Manual
Dynamic Range	80dB
Video Output Signal	HD Analog Output
PTZ (Manual)	
Pan	0° ~360°
Tilt	0° ~90°
Rotation	0° ~360°
Interface	
Coaxial OSD Control	4 IN 1 Outputs (AHD-TVI-CVI-CVBS)
Transmission Distance	Up to 500m over coaxial cable
Audio	
Compression	G.711A/U
Talk Back	Support (Optional)
General	
Material	Plastic Enclosure
Operating Conditions	-10° C ~ +60° C/ Less than 90% RH



*Product specifications & appearance are subject to change without prior notice or obligation.

Storage Conditions	-10° C ~ +60° C / Less than 90% RH
Ingress Protection	IP66
Vandalism Protection	NA
Power supply	DC 12V ± 10%, 250mA
Power Consumption	Max 3.5W
Dimension & Weight	205mm x 73mm x 80mm, 300g
Product Certification	Safety: CE, FCC, IS/EN:60950-1, IS:13252 (Part 1): 2010, BIS Registered

Ordering Information:

Sr. No.	Ordering Model	WDR	Audio	LED Range
1.	SC-ASR50BP-D25	80dB	NA	Up to 20M
2.	SC-ASR50BP-D25 with Audio	80dB	Yes	Up to 20M



*Product specifications & appearance are subject to change without prior notice or obligation.