


## AHD Dual Light Dome Camera

- High Resolution 2MP
- Ultra Low Illumination
- Long-Distance Real-Time Transmission
- OSD Control 4 IN 1 OUTPUTS
- NDAA Compliant



### Dual LED Night Vision

Our Dual light source cameras are equipped with dual light source LEDs. IR Lights allow users to see HD images in night while white light turn on automatically when detecting human and provide colorful image even in complete darkness.

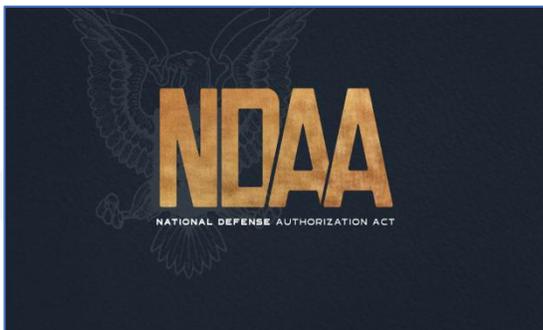

### NDAA Compliant

Our HD Cameras are NDAA compliant that conform to the guidelines set by National Defense Authorization Act & do not use components made by the listed prohibited Manufacturers.

### 4 IN 1 Outputs (AHD-TVI-CVI-CVBS)

One camera with 4 different video standard outputs. Sparsh analog cameras can provide AHD/TVI/CVI/CVBS outputs as per the requirement. Outputs can be conveniently controlled by OSD.



## Technical Specifications:

Specifications	SC-ASR20DP-D25	SC-ASR20DP-D25A
<b>Camera</b>		
Image sensor	1/2.9" Progressive CMOS Sensor	
Effective Pixels	1920(H) X 1080(V)	
Min. Illumination	0.001Lux @ (F1.2, AGC ON)	
S/N Ratio	>55dB	
Shutter Speed	1/50ec ~ 1/50000 sec	
LEDs	2 Dual Light LEDs	
LED Range	Up to 20Mtr	
Signal System	PAL/NTSC	
<b>Lens</b>		
Lens Type	Fixed	
Mount Type	M12	
Focal Length	3.6mm	
Max. Aperture	F2.0	
Angle Of View	<b>3.6mm:</b> 70.9°	
Focus Control	Fixed	
<b>Image</b>		
Resolution	2MP@25fps	
Image Setting	Color, Brightness, Sharpness	
BLC Mode	On/Off	
White Balance	Auto/Manual	
Gain Control	Auto/Manual	
Dynamic Range	80dB	
Video Output Signal	HD Analog Output	
<b>PTZ (Manual)</b>		
Pan	0° ~360°	
Tilt	0° ~90°	
Rotation	0° ~360°	
<b>Interface</b>		
Coaxial OSD Control	4 IN 1 Outputs (AHD-TVI-CVI-CVBS)	
Audio	NA	Support Over Coaxial
Transmission Distance	Up to 500m over coaxial cable	
<b>Audio</b>		
Compression	NA	G.711A/U
Talk Back	NA	Support
<b>General</b>		
Material	Plastic Enclosure	



\*Product specifications & appearance are subject to change without prior notice or obligation.

Operating Conditions	-10° C ~ +60° C / Less than 90% RH
Storage Conditions	-10° C ~ +60° C / Less than 90% RH
Ingress Protection	NA
Vandalism Protection	NA
Power supply	DC 12V ± 10%, 250mA
Power Consumption	Max 3.5W
Dimension & Weight	105mm x 105mm x 95mm, 225g
Product Certification	Safety: CE, FCC, IS/EN:60950-1, IS:13252 (Part 1): 2010, BIS Registered

### Ordering Information:

Sr. No.	Ordering Model	WDR	Audio	LED Range
1.	SC-ASR20DP-D25	80dB	NA	Up to 20M
2.	SC-ASR20DP-D25A	80dB	Yes	Up to 20M



\*Product specifications & appearance are subject to change without prior notice or obligation.