


AHD Dual Light Bullet Camera

- High Resolution 2MP
- Ultra Low Illumination
- Long-Distance Real-Time Transmission
- OSD Control 4 IN 1 OUTPUTS
- IP66 Compliant
- NDAA Compliant



Dual LED Night Vision

Our Dual light source cameras are equipped with dual light source LEDs. IR Lights allow users to see HD images in night while white light turn on automatically when detecting human and provide colorful image even in complete darkness.

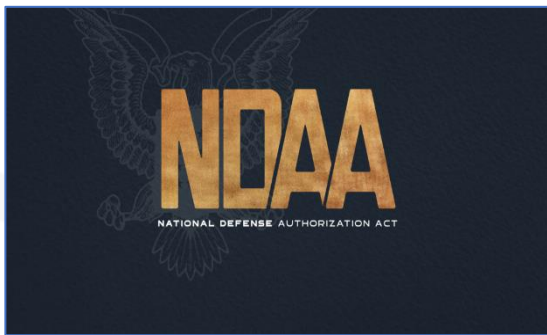

NDAA Compliant

Our HD Cameras are NDAA compliant that conform to the guidelines set by National Defense Authorization Act & do not use components made by the listed prohibited Manufacturers.

4 IN 1 Outputs (AHD-TVI-CVI-CVBS)

One camera with 4 different video standard outputs. Sparsh analog cameras can provide AHD/TVI/CVI/CVBS outputs as per the requirement. Outputs can be conveniently controlled by OSD.



Technical Specifications:

Specifications	SC-ASR20BP-D25	SC-ASR20BP-D25A
Camera		
Image sensor	1/2.9" Progressive CMOS Sensor	
Effective Pixels	1920(H) X 1080(V)	
Min. Illumination	0.001Lux @ (F1.2, AGC ON)	
S/N Ratio	> 55dB	
Shutter Speed	1/50ec ~ 1/50000 sec	
LEDs	4 Dual Light LEDs	
LED Range	Up to 20Mtr	
Signal System	PAL/NTSC	
Lens		
Lens Type	Fixed	
Mount Type	M12	
Focal Length	3.6mm	
Max. Aperture	F2.0	
Angle Of View	3.6mm: 70.9°	
Focus Control	Fixed	
Image		
Resolution	2MP@25fps	
Image Setting	Color, Brightness, Sharpness	
BLC Mode	On/Off	
White Balance	Auto/Manual	
Gain Control	Auto/Manual	
Dynamic Range	80dB	
Video Output Signal	HD Analog Output	
PTZ (Manual)		
Pan	0° ~360°	
Tilt	0° ~90°	
Rotation	0° ~360°	
Interface		
Coaxial OSD Control	4 IN 1 Outputs (AHD-TVI-CVI-CVBS)	
Audio	NA	Support Over Coaxial
Transmission Distance	Up to 500m over coaxial cable	
Audio		
Compression	NA	G.711A/U
Talk Back	NA	Support
General		
Material	Plastic Enclosure	



*Product specifications & appearance are subject to change without prior notice or obligation.

Operating Conditions	-10° C ~ +60° C / Less than 90% RH
Storage Conditions	-10° C ~ +60° C / Less than 90% RH
Ingress Protection	IP66
Vandalism Protection	NA
Power supply	DC 12V ± 10%, 250mA
Power Consumption	Max 3.5W
Dimension & Weight	205mm x 73mm x 80mm, 300g
Product Certification	Safety: CE, FCC, IS/EN:60950-1, IS:13252 (Part 1): 2010, BIS Registered

Ordering Information:

Sr. No.	Ordering Model	WDR	Audio	LED Range
1.	SC-ASR20BP-D25	80dB	NA	Up to 20M
2.	SC-ASR20BP-D25A	80dB	Yes	Up to 20M



*Product specifications & appearance are subject to change without prior notice or obligation.