

## 2MP Dome IP Camera

- 2MP 1/2.7" CMOS image sensor, low luminance, and high-definition image
- **Intelligent Analytics Supported:** Human Detection, Intrusion Detection, Audio Detection, Object Left, Object Lost, Line crossing, Scene Change
- SD card supported up to 512GB.
- Wide Dynamic Range up to 120dB
- Digital Alarm 1 Ch In/ 1 Ch Out
- NDAA Compliant



Rev 1.2

### AI Video Analytics

In the ever-evolving landscape of surveillance technology, the Sparsh Gold Series IP Camera stands out as a beacon of innovation and intelligence. Engineered with cutting-edge features, this camera transcends the boundaries of conventional surveillance, offering an unparalleled level of insight and security. These cameras are powered by Advance AI functions such as Human Detection, Intrusion Detection, Audio Detection, Object Left, Object Lost, Line crossing, Scene Change.




### Superior Image Quality

Discover a new realm of clarity and precision with Sparsh Gold Series IP Cameras. Equipped with advanced low-light image sensors, these cameras redefine your surveillance experience, capturing vivid details even in the darkest of environments. Say goodbye to washed-out visuals and distorted imagery—our cameras boast Wide Dynamic Range (WDR) technology, ensuring unparalleled image quality even in challenging lighting conditions. Elevate your surveillance game with Sparsh Gold Series IP Cameras and witness every detail come to life, day or night.

### NDAA Compliant

Experience peace of mind with the Sparsh Gold Series IP Camera—an embodiment of cutting-edge security technology that goes above and beyond. Our commitment to your safety extends even further, as these cameras are fully NDAA compliant. With adherence to the National Defense Authorization Act's rigorous standards, rest assured that your surveillance solution not only offers unmatched performance but also aligns with the highest levels of regulatory compliance. Elevate your security with confidence—choose Sparsh Gold Series IP Cameras, where innovation meets compliance seamlessly.

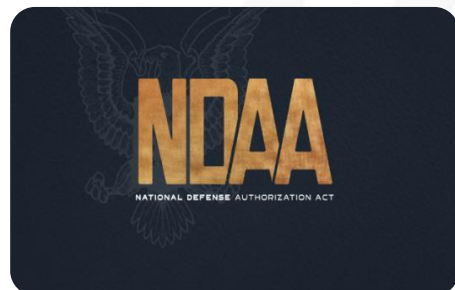

## Technical Specifications:

Specifications	SC-IGH20D-3L25
<b>Camera</b>	
Image sensor	1/2.7" Progressive Scan CMOS Sensor
Max Resolution	1920(H)x1080(V)
Min. Illumination	0.0009 Lux@F1.5(Color, 30IRE), 0.0005 Lux@F1.5(B/W, 30IRE), 0 lux (Illuminator on)
S/N Ratio	>58dB
IR Distance	20-25Mtr
IR On/Off Control	Day, Night, Auto, Scheduled
IR LEDs	15 IR LEDs
IR On/Off Control	Auto/ Manual
<b>Lens</b>	
Lens Type	Fixed
Mount Type	M12
Focal Length	3.6mm
Max. Aperture	F1.5
Angle Of View	3.6 mm: H: 88°; V: 44°; D: 105°
Iris control	Fixed
Focus Control	Auto
Close Focus Distance	3.6 mm: 1.3 m
<b>Video</b>	
Compression	H.265/H.264/ H.265SE / H.264SE
Streaming Capability	2 Streams
Smart Codec	H.265SE , H.264SE
Resolution	2MP/D1/ VGA /CIF
Streams	<b>Mainstream:</b> 2MP@60fps, <b>Sub Stream:</b> D1 (704x576)/ VGA(640x480)/CIF (352x288)@25/30fps
Bit Rate	5kbps-8192kbps
Bit Rate Control	CBR/VBR
Day/ Night	Automatic/Day/Black and white
Exposure Mode	Automatic/Manual-(1/25~1/100000)
WDR	Upto 120dB
BLC Mode	On/Off
HLC Mode	On/Off
Profiles	Auto, Low Light Priority, High Light Priority
White Balance	Automatic
Gain Control	Auto/Manual
Noise Filter	Auto, 2D/3D (1-6 Levels)
Digital Zoom	16X, Area's selection with Mouse
Anti - Flicker	On/Off

Flip	On/Off
IR Reverse	Support
Mirror	On/Off
Text Overlay	Title, Date & Time, Weekday
Privacy Masking	Yes (4 zones)
<b>Events</b>	
Motion Detection	22X18 Zones
Video Blind	Support
Abnormality	No Disk, Disk Error, Disk No Space, Network Cable Disconnected, IP Address Conflict
Smart Functions	Human Detection, Intrusion Detection, Smart Sound Detection, Line crossing, Scene Change, Object Left, Object Lost
Event Actions	Record alarm, Linkage alarm output, Sound alarm, Email link, Upload FTP, Snapshot
<b>PT (Manual)</b>	
Pan	0° ~360°
Tilt	0° ~90°
<b>Safety</b>	
Security	Authorized username and password, HTTPS with password, RTSP Validation, User Access Log, User Authentication, Watermark, IP address filtering, 802.1x; IP/MAC filtering; HTTPS; trusted upgrade; trusted boot; firmware encryption; generation of X.509 certification
ONVIF Authentication	On/Off
RTSP Authentication	Digest, None
<b>Audio</b>	
Compression	G.711A/U
Talk Back	Support (Optional)
<b>Network</b>	
Ethernet	10/100M adaptive Ethernet interface
Protocol	TCP/IP, UDP, IPv4, ICMP, HTTP, HTTPS, HTTP-Base64, HTTP-Digest, DHCP, DNS, DDNS, RTP, RTSP, RTCP, NTP, UPnP, SMTP, FTP, IGMP, P2P, IP Filter, IPV6, SNMP V1 & V2
Interoperability	ONVIF Profile S & G
Max. user Access	30 Users
Edge storage	Local PC for instant recording, one clicks Snapshot, one clicks triple Snapshot
Cloud Storage	Dropbox, Google Drive
Web Viewer	IE, Chrome, Firefox, Safari
Management Software	Sparsh VMS
Smart Phone	Supports Omnisurv pro app for iPhone, Android
<b>Interface</b>	
Audio	1 IN/1 Out (Optional)
Alarm	1IN/1 Out (Optional)
SD Card	Support up to 512GB (Optional)
<b>General</b>	
Operating Conditions	-30° C ~ +60° C (-22° F ~ +140° F) / Less than 95% RH



Storage Conditions	-30° C ~ +60° C (-22° F ~ +140° F) / Less than 95% RH
Ingress Protection	IP66
Vandalism Protection	IK10
Power supply	DC 12V ± 10%, Optional: PoE (802.3af, class 3)
Power Consumption	Max 12W
Dimension & Weight	135mm(H) x140mm(L) x 140mm(W), 630 g
Product Certification	Safety: CE, FCC, IS/EN:60950-1, IS:13252 (Part 1): 2010, BIS Registered

### Ordering Information:

Sr. No.	Ordering Model	Audio	Alarm	SD Card	IR Range
1.	SC-IGH20D-3L25	NA	NA	NA	Up to 25M
2.	SC-IGH20D-3L25 with SD card	NA	NA	Yes	Up to 25M
3.	SC-IGH20D-3L25 with Audio, Alarm & SD card	Yes	Yes	Yes	Up to 25M



\*Product specifications & appearance are subject to change without prior notice or obligation.

